
Discharge Devices & Nozzles

Foam / Sprinkler Nozzles | US & USD Low Expansion Foam Nozzles




Related Documents	None available
Material (Body & Nozzle)	Stainless steel AISI 316
Connection	1" BSP
Working pressure	3-8 bar
Options	• Flange connections UNI/DIN or ANSI/ASA • Different flow rates
Weight	See table

US

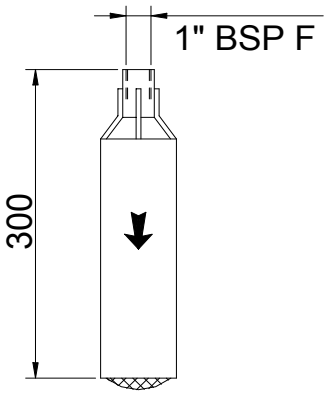

USD

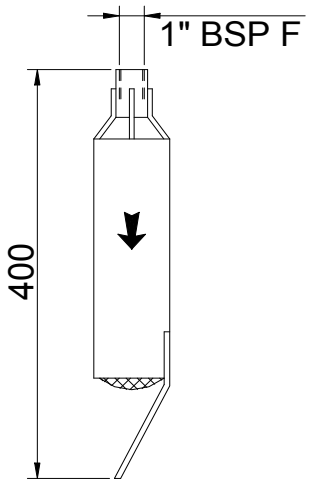

Part number	K-factor	Flow rate (l/min @ 5 bar)	Working pressure (bar)	Foam production (l/min @ 5 bar)[1,2]	Weight (kg)
US	53.7	120	3-8	750	20.0
USD	53.7	120	3-8	750	26.0

[1] Foam production using fresh air, or as otherwise indicated by the manufacturer
[2] Depending on the foam concentrate used. For actual expansion performance data, tests with device and selected foam concentrate should be conducted

PS2.3.4.8/12122018/en

Note: This document contains basic product information only. Information, photos and drawings are not contractually binding.
In all cases, the manufacturer's full technical documentation (see "Related Documents" above) remains the reference document.
Note that certificates, test reports and approvals may be published in the OEM name.
The contents of this publication are subject to modifications without notice. All rights reserved

© K.C. Antincendi S.r.l. | Via Pavia 76 | 27042 Bressana Bottarone (PV) | Italy | info@kcantincendi.com