
Discharge Devices & Nozzles


Tank Protection | LF Foam Maker



Related Documents	None available
Body & Flange material	Carbon steel
Material (Orifice)	Stainless steel
Connection	Flange PN16 & ANSI
Weight	See table
Finish	Red epoxy (Flame red RAL3000)
Options	Body and flange material: • Stainless (AISI 304 / AISI 316) • Hot dipped galvanised • Painted galvanised

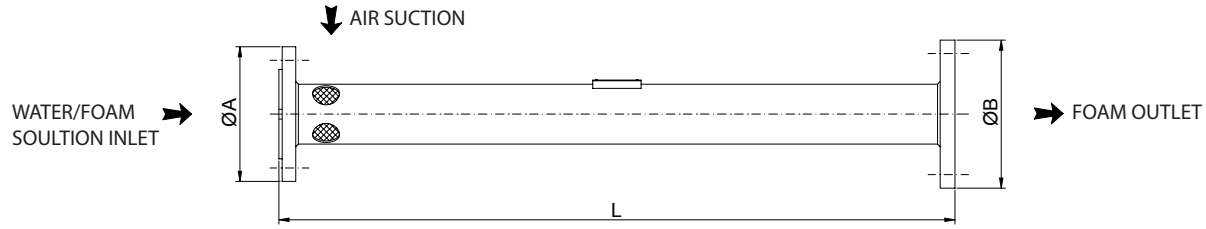

STYLE 1

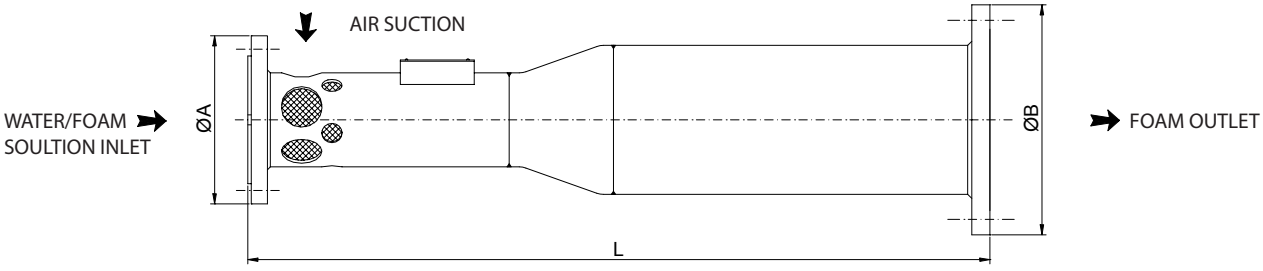

STYLE 2

Part number	Style	ØA	ØB	L (mm)	Flow rate (l/min - 5 bar)	Foam production (l/min - 5 bar)[1,2,3]	Working pressure (bar)	Weight (kg)
LF-02	1	2"	3"	705	200	1,200	5-16	10.0
LF-04	1	2"	3"	705	400	2,400	5-16	10.0
LF-08	1	3"	4"	1,005[4]	800	4,800	5-16	15.0
LF-12	1	4"	6"	1,103	1,200	7,200	5-16	25.0
LF-16	1	4"	6"	1,103	1,600	9,600	5-16	25.0
LF-20	1	4"	8"	1,103	2,000	12,000	5-16	28.0
LF-24	2	5"	8"	1,103	2,400	14,400	5-16	50.0
LF-32	2	5"	8"	1,103	3,200	19,200	5-16	50.0

[1] Expansion ratio: 6:1 @ 5 bar
[2] Foam production using fresh air, or as otherwise indicated by the manufacturer
[3] Depending on the foam concentrate used. For actual expansion performance data, tests with device and selected foam concentrate should be conducted
[4] DIN/UNI version. ANSI version: L-1027

Note: This document contains basic product information only. Information, photos and drawings are not contractually binding.
In all cases, the manufacturer's full technical documentation (see "Related Documents" above) remains the reference document.
Note that certificates, test reports and approvals may be published in the OEM name.
The contents of this publication are subject to modifications without notice. All rights reserved

© K.C. Antincendi S.r.l. | Via Pavia 76 | 27042 Bressana Bottarone (PV) | Italy | info@kcantincendi.com