
Discharge Devices & Nozzles

Tank Protection | CS Foam Chamber



Related Documents	None available
Approvals	RUS
Body & Flange material	Carbon steel
Material (Rupture Disc)	Glass
Material (Orifice)	Stainless steel
Connection	Flange PN16 & ANSI
Finish	Red epoxy (Flame red RAL3000)
Options	• Stainless body • Stainless flanges • Hot dipped galvanised
Weight	See table

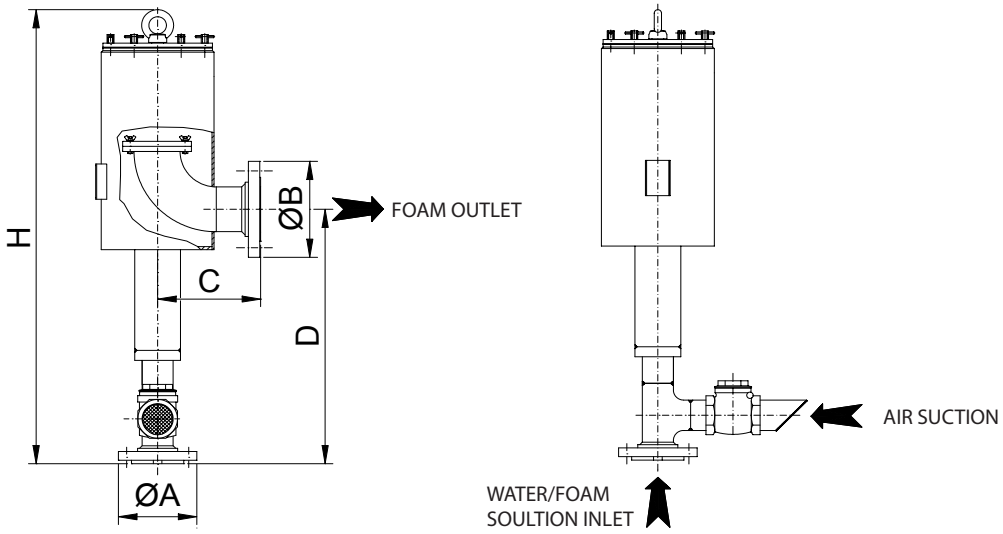

Part number	Dimensions					Flow rate (l/min - 5 bar)	Foam production (l/min - 5 bar)[1,2]	Working pressure (bar)	Weight (kg)
	ØA (inch)	ØB (inch)	H (mm)	C (mm)	D (mm)				
CS-02	2"	3"	845	200	500	200	1,500	3-16	32.0
CS-04	2"	4"	845	200	500	400	3,000	3-16	34.6
CS-08	3"	6"	1042	300	600	800	6,000	3-16	70.6
CS-15	4"	8"	1081	300	645	1,500	11,000	3-16	84.6
CS-20	4"	8"/10"	1368	400	855	2,000	14,000	3-16	123.6

[1] Depending on the foam concentrate used. For actual expansion performance data, tests with device and selected foam concentrate should be conducted
[2] The indicated production is obtained with fresh air, or otherwise indicated by the manufacturer

Note: This document contains basic product information only. Information, photos and drawings are not contractually binding.
In all cases, the manufacturer's full technical documentation (see "Related Documents" above) remains the reference document.
Note that certificates, test reports and approvals may be published in the OEM name.
The contents of this publication are subject to modifications without notice. All rights reserved

PS2.3.4.11/12122018/en

© K.C. Antincendi S.r.l. | Via Pavia 76 | 27042 Bressana Bottarone (PV) | Italy | info@kcantincendi.com