


Monitor Equipment

Self-Oscillating Monitor | GA Self-Oscillating Unit

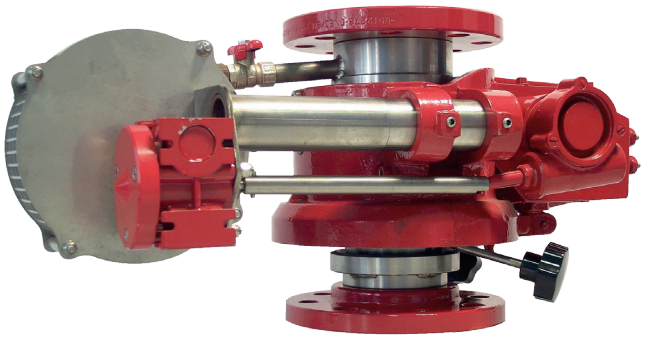

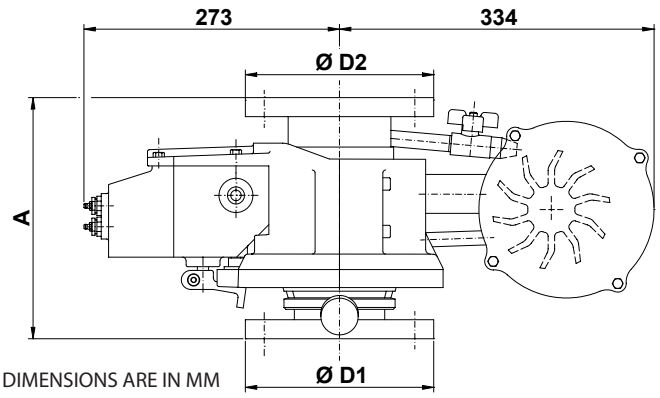

DIMENSIONS ARE IN MM

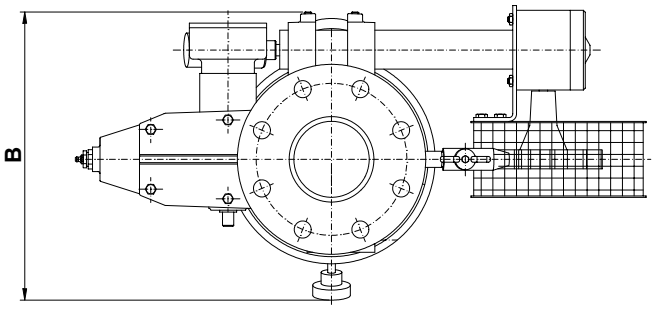

Related Documents	None available
Approvals	CE, RU, CNBOP
Material (Body)	Stainless steel AISI 316
Material (Flange)	Carbon or stainless steel
Material (Gearbox)	Aluminium
Working pressure	2.5 bar (Min) - 16 bar* (Max)
Finish	Red epoxy (Flame red RAL3000)
Connection Type	Flange PN16
Rotation	15° to 360° continuous
Rotation Speed	4°/second @ 7 bar
Options	• Polished stainless steel finish • ANSI flanges
Weight	See table

*** Note:**
Lower working pressures may need to be assessed based upon how the monitor is operated, supported and where installed.
Please refer to recoil force table for further information.

Part number*	A (mm)	B (mm)	ØD2 (inch) PN16	Flange material	ØD1 (inch) PN16	Max. flow rate (l/min)	Weight (kg)
GA-3X-3CS	254	306	3"	Carbon steel	3"	4,000	18.0
GA-3X-3SS	254	306	3"	Stainless steel	3"	4,000	18.0
GA-3X-4CS	254	306	3"	Carbon steel	4"	4,000	18.0
GA-3X-4SS	254	306	3"	Stainless steel	4"	4,000	18.0
GA-4X-4CS	264	355	4"	Carbon steel	4"	8,000	20.0
GA-4X-4SS	264	355	4"	Stainless steel	4"	8,000	20.0
GA-4X-6CS	264	355	4"	Carbon steel	6"	8,000	20.0
GA-4X-6SS	264	355	4"	Stainless steel	6"	8,000	20.0

*For polished stainless steel finish - add "-L" on the end (Example GA-3X-3CS-L)

PS2.3.5.6/12122018/en

Note: This document contains basic product information only. Information, photos and drawings are not contractually binding.
In all cases, the manufacturer's full technical documentation (see "Related Documents" above) remains the reference document.
Note that certificates, test reports and approvals may be published in the OEM name.
The contents of this publication are subject to modifications without notice. All rights reserved

© K.C. Antincendi S.r.l. | Via Pavia 76 | 27042 Bressana Bottarone (PV) | Italy | info@kcantincendi.com